

AG 300

Floor grilles

Product

Construction material
Finishing

AG 300

Aluminium

Natural anodized

AGS 300

Aluminium

Natural anodized

AG and AGS 300 floor supply/exhaust grilles especially in computer rooms and telephone centers. These grilles are fitted with a series of fixed horizontal vanes, out of anodized natural aluminium, which are mechanically assembled. These grilles are very sturdy to bear the weight of people walking over them. According to the size the acceptable load goes from 200 to 600 kg.

They come in two versions:

- AG 300: with outer frame. Removable core fixed by springs to the floor frame, front straight vanes.
- AG 320 like AG 300 except that the front vanes are 15° bent.
- AGS 300, without frame, only with vanes.

Applications AG, AGS 300 floor exhaust/supply grilles are used in computer centers, telephone centers, rooms with a lot of electronic equipment, laboratories, etc. Standard thickness 30 mm, other dimensions on request.


Nominal size (mm)

L H



200	x	100
300	x	100
400	x	100
500	x	100
600	x	100
800	x	100
1000	x	100
300	x	150
400	x	150
500	x	150
600	x	150
800	x	150
1000	x	150
400	x	200
500	x	200
600	x	200
800	x	200
1000	x	200
500	x	300
600	x	300
800	x	300
1000	x	300

Maximum possible sizes 2000 x 400 mm



Size

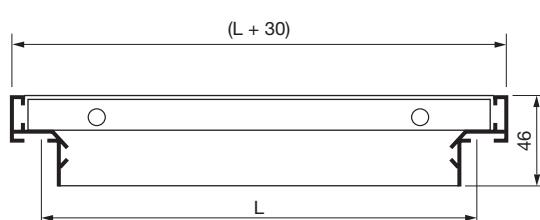


AG 300

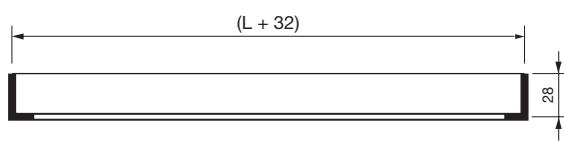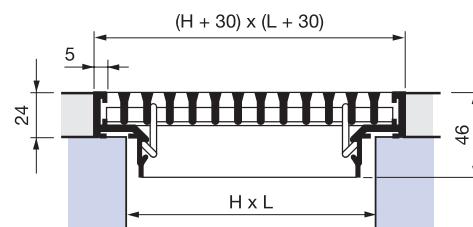


GR 013

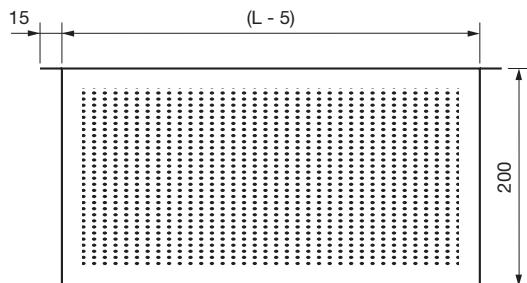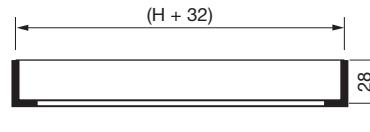

RP / AG



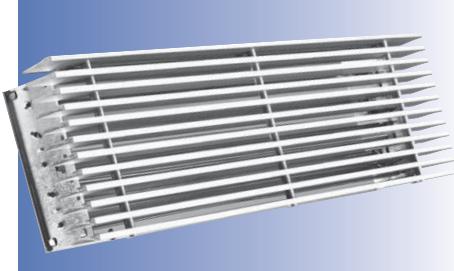

AGS 300

Floor grilles

Nominal
size (mm)

L H

600 x 150

600 x 200




600 x 300

600 x 600


Always specify the height of the thickness
(40,45,50)

• Product ready in STOCK

Size

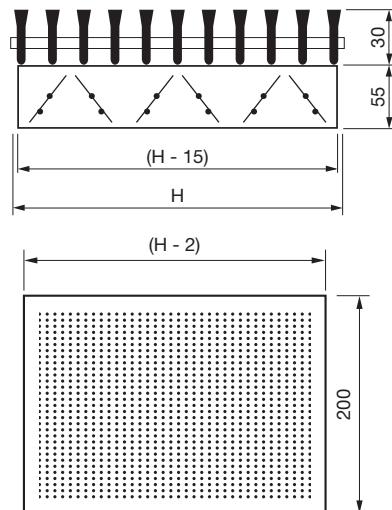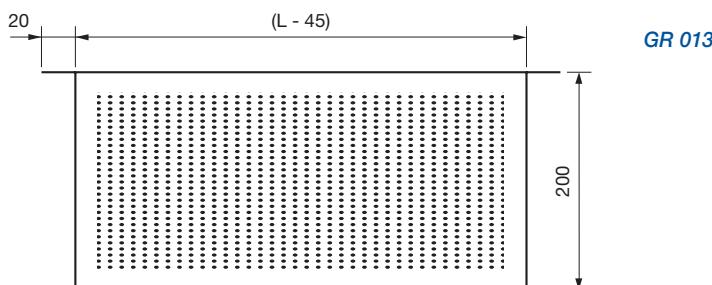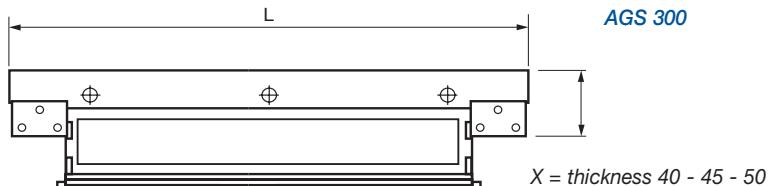

Quick selection

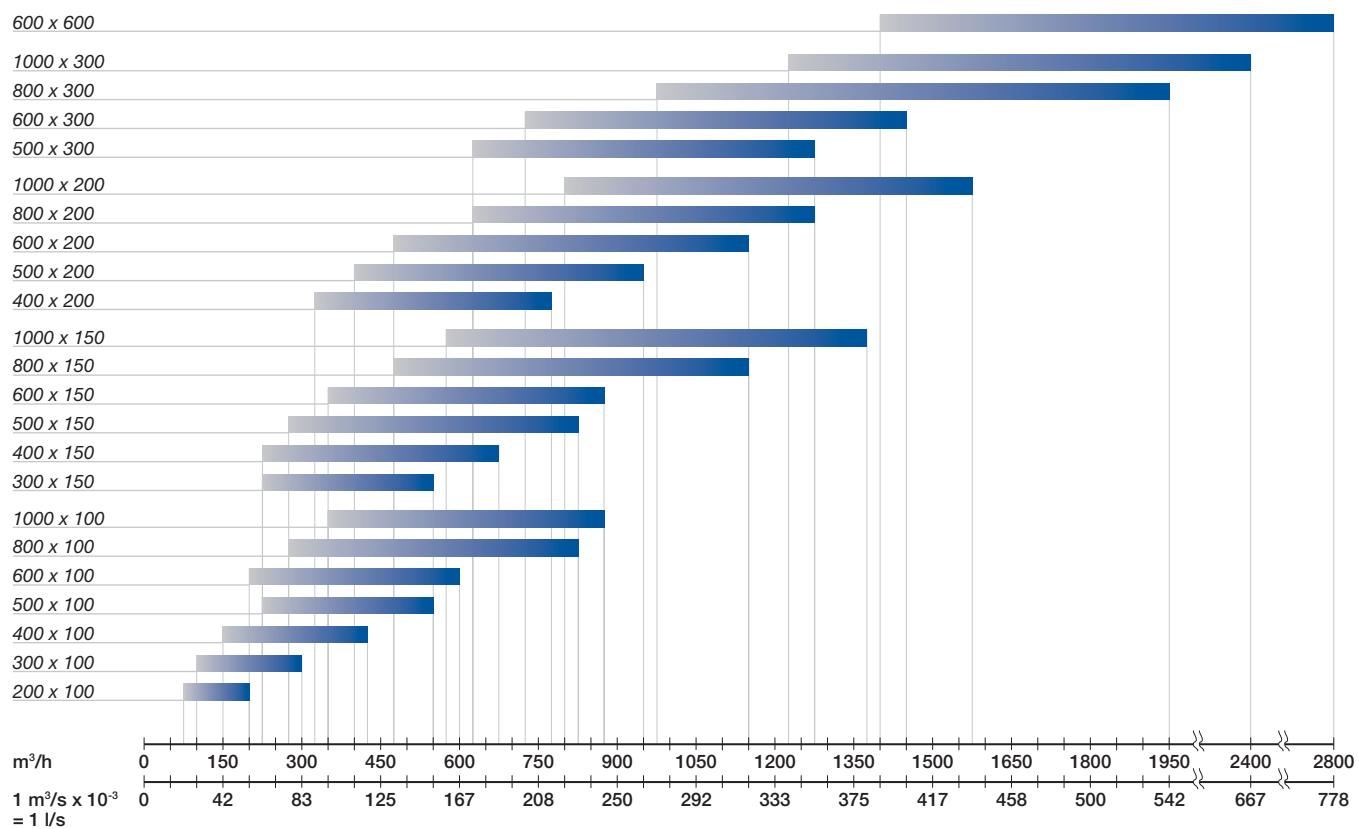

The air flow rates and the pressure drop rates are certified according to the UNI 8728 and prEN 12238 standards, by an independent and certified body, in compliance with the legislation in force on energy saving standards.

	Q min.	Q max
NR	< 25	< 35
Pressure drop Pa	5	< 20