



AD 300

Grilles with fixed face vanes

Product	AD 300
Construction material	Aluminium
Finishing	Natural anodized

AD 300 grilles with fixed face vanes are completely made out of extruded anodized aluminium. Their top quality manufacturing level is topped with an impeccable linear design. They are fitted with fixed horizontal vanes which can be straight or 15° bent.

AC 300 models, are similar to the AD 300 models, but they do have a frame. On request, for all grilles we supply adjustable vane equalizers in anodized aluminium.

Applications AD 300 grilles can be used in areas which call for top quality air distribution systems combined with an impeccable design. They are suitable for supply and exhaust systems and allow you to follow the same style throughout the whole system.


Nominal size (mm)		Nominal size (mm)	
L	H	L	H
200 x 75		300 x 150	
300 x 75		400 x 150	
400 x 75		500 x 150	
500 x 75		600 x 150	
600 x 75		800 x 150	
800 x 75		1000 x 150	
1000 x 75		400 x 200	
200 x 100		500 x 200	
300 x 100		600 x 200	
400 x 100		800 x 200	
500 x 100		1000 x 200	
600 x 100		500 x 300	
800 x 100		600 x 300	
1000 x 100		800 x 300	
		1000 x 300	

Size

ON REQUEST

type AD 300

Fixing with clips and relevant counter-frame

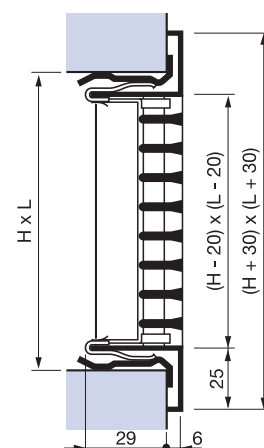

type AC



type A 310 - A 330


with flow equalizer



ON REQUEST

type AE ...


Fixing with hidden screws and relevant counter-frame




ON REQUEST

type AF ...

Fixing with screws



Lengths

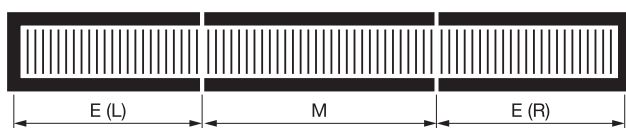

Maximum possible length in one piece = 2000 mm
Maximum possible length = 600 mm
Left terminal section = L Right terminal section = R

All combination for lengths in multiples of 100 mm are possible with sections M and E (prices on request)



How to order

A	D	3	0	0
Construction without frame C (only version 300)	Fixing with clips D	Fixing with hidden screws E	Fixing with screws F	Construction with 20 mm A frame
0 Without damper	1 With GT 007 damper	1 With adjustable back vertical row	2 With 15° deflection vanes	3 With adjustable back vertical row and 15° deflection vanes.
3 Pitch 12.5 mm				

AD 300

grilles with fixed face vanes


Quick selection

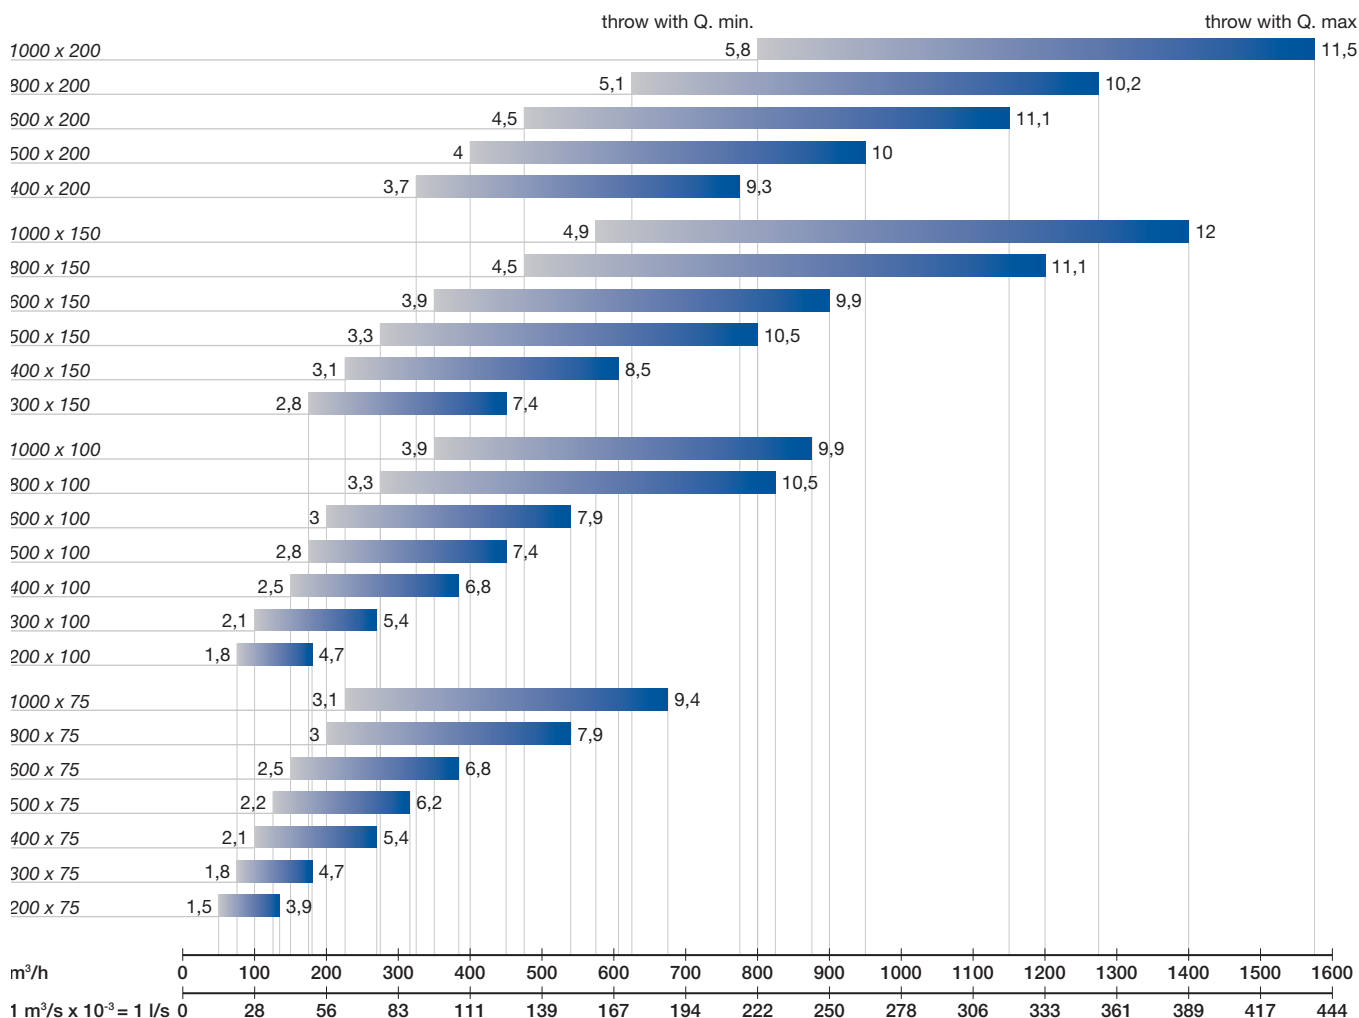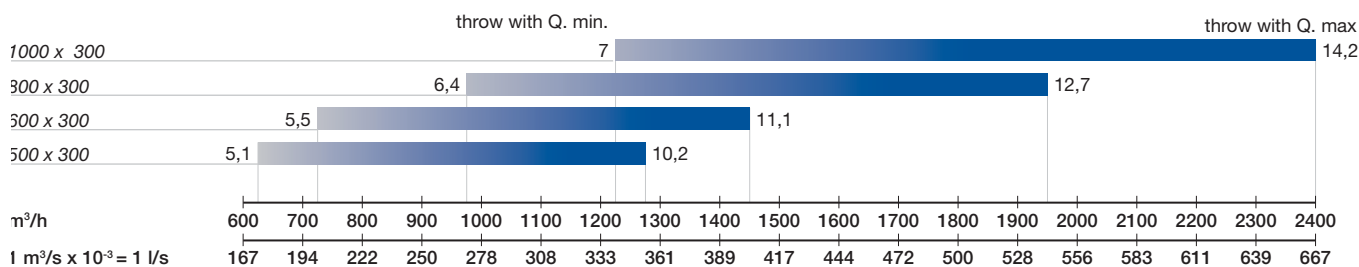

The air flow rates and the pressure drop rates are certified according to the UNI 8728 and prEN 12238 standards, by an independent and certified body, in compliance with the legislation in force on energy saving standards.


	Q min.	Q max
NR	< 25	< 35
Pressure drop Pa	< 5	< 20

Inspection door

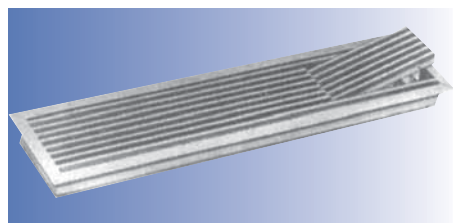

The AD 300 series can be supplied with left or right inspection door.

Aluminium sheet door



$$B = H - 20 \text{ mm}$$

Grid door

