

SG

Air-tight inspection doors

Product

SG

Construction material

Steel

Finishing

Electrolytic galvanized



SG air-tight inspection doors and SGW air and water-tight inspection doors are in galvanized steel sheet and are fitted with a T-shaped frame and hangers for wall installation. SG doors are provided with metal handles for right (R) or left (S) opening. They also have a gasket along side the entire frame for tightness. SGW doors are closed by cross rods and locking wheels. There are two different models for SG and SGW air-tight doors:

- Single leaf
- Double leaf

The double leaf type includes soundproof and thermal insulated panels which assure good thermal insulation and acoustic attenuation.



Applications SG air-tight doors are used in air systems to access ventilation rooms, air treatment units, air cleaning units, filter sections, etc.

Size

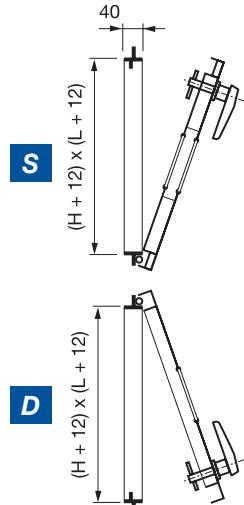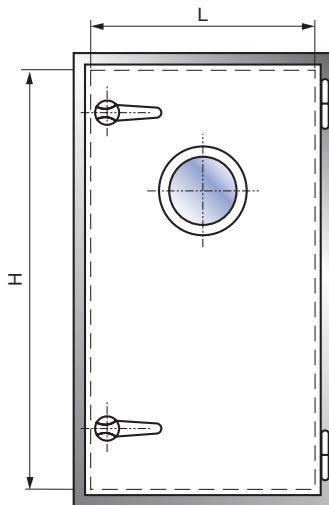

Sizes (mm)		SG 20 D/S single leaf	SG 21 D/S double insulated leaf
L	H	€	€
300	300	•	•
400	400	•	•
500	500	•	•

Sizes (mm)		SGA 20 D/S single leaf with windows	SGA 21 D/S double insulated leaf with windows
L	H	€	€
600	600	•	•
500	1500	•	•
600	1600	•	•
600	1800	•	•
800	1800	•	•
940	1940	•	•

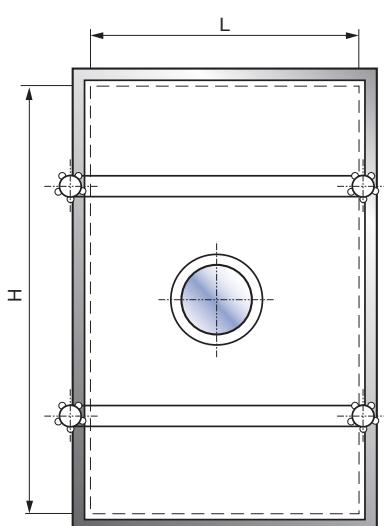

Sizes (mm)		SGW 20 D/S water-tight single leaf	SGW 21 D/S water-tight double leaf
L	H	€	€
350	500	•	•
400	600	•	•
500	700	•	•
600	1000	•	•

Sizes (mm)		SGWA 20 D/S water-tight single leaf with windows	SGWA 21 D/S water-tight double leaf with windows
L	H	€	€
350	500	•	•
400	600	•	•
500	700	•	•
600	1000	•	•

Specify W x H and opening:
right (R) or (L) in the order

$L \times H$
 $L + 12 \times H + 12$ size door passage
hole size