



PW 1

Floor diffusers

Product
Construction material
Finishing

PW 1
Plastic
RAL 7040

Thanks to the PW 1 diffuser, the high induction rate produced by the swirl effect, determines a rapid reduction of the speed and an adjustment of the supply temperature with that of the room.


Applications The PW 1 diffuser is particularly suitable for installation in telecommunication rooms, computerized centers and similar.

Construction The diffuser is made of plastic with incombustible material

according to the fire prevention safety standards with high mechanical resistance. The diffusers are generally available in gray, RAL 7040.


Other colors are available upon request.

Description of product

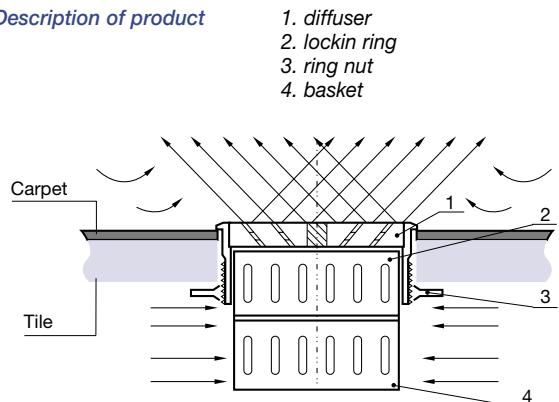


Size

Size	Sizes (mm)				
	ø A	ø B	ø C	D	E
200	220	210	200	190	22

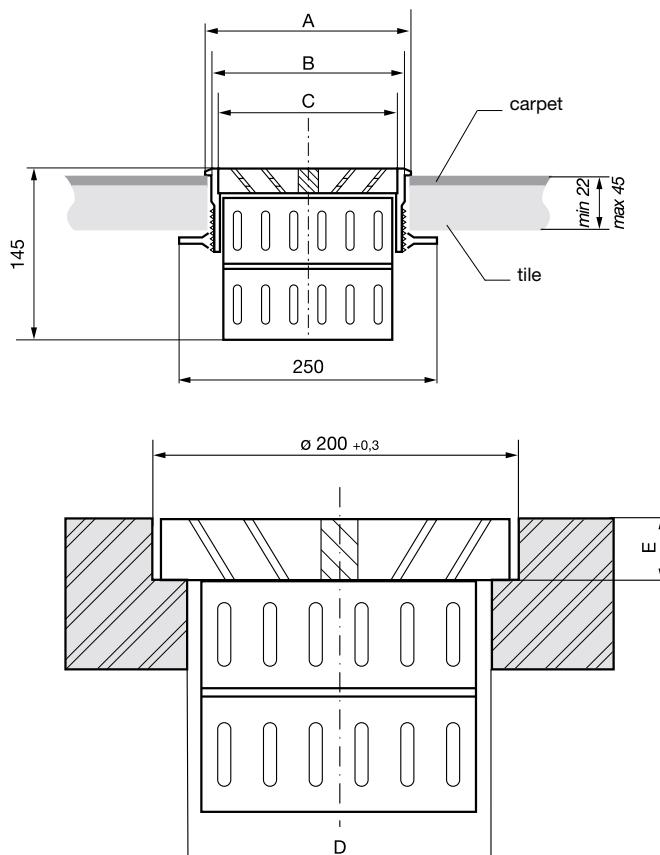

Quick selection

PW 1

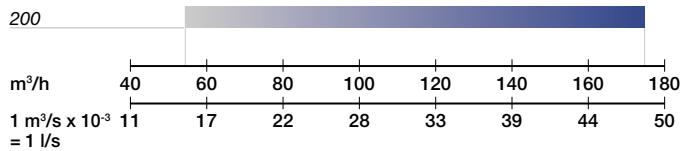

	Q min.	Q max.
dB(A)	< 15	30
Pressure drop Pa	< 15	20

How to order

P W 1 a b c

Floor diffuser

Diffuser type
Without locking ring 0
With locking ring 1

Without installation sleeve 0
With installation sleeve 1

Without basket 0
With basket 1